

3 doors Horizontal Refrigerators

GN 1/1

NT 0/+10°C



Main features:

Inside and outside made of Stainless Steel, except for the external bottom made of Galvanized Steel. High Pressure Polyurethane injected without hazardous gases for the environment. Insulation thickness NT counters: 40 mm. Insulation thickness LT counters: 60 mm. Self-closing doors with magnetic gaskets. Electronic front control panel with NTC probe. Ventilated cooling. Tropicalized and extractable "monoblock type" condensing unit (ambient temperature +43°C and relative humidity of 65%) with gas R404A/R507. Refrigerated NT and LT counters designed also for remote condensing unit. Completely automatic defrosting and condense water evaporation. Adjustable Stainless Steel feet (110/190 H mm). Personalization options available.


Standard set up:

- 3 GN 1/1 Rilsan shelf
- 6 Stainless Steel "L" runners
- Set of 2 castors wth brake and 2 w thout brake



Stainless Steel AISI 304

DIMENSIONS	WxDxH mm	1870x700x850/920
NET WEIGHT	kg	102
NET CAPACITY	l	460
TEMPERATURE	°C	0 / +10
GAS	GAS	R404A/R507
TEST DETAILS	°C / RH	+43 / 65%
ABSORBED POWER	W	495
ENERGY CONSUMPTION	kWh/year	1478,62
POWER SUPPLY	V-P-Hz	230-1-50

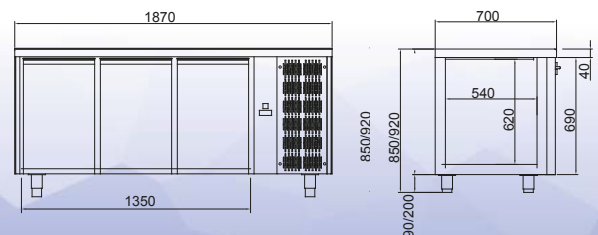

Mobile: 0414 887 298
 Phone: 07 3279 5204
 Fax: 07 3376 4142
paul@acecateringequipment.com.au
www.acecateringequipment.com.au

100% Made in Italy